DEPARTMENT OF PUBLIC WORKS
815-724-4200 Direct
815-723-7770 Fax
Email: dortiz@joliet.gov

CITY OF JOLIET

150 WEST JEFFERSON STREET
JOLIET, ILLINOIS 60432-4158

CITY OF JOLIET

MAY 3, 2022

ADDENDUM NO. 1

TO: **2022 SIDEWALK/ CURB REPLACEMENT PROJECT- CENTRAL JOLIET AREA**

THE ATTENTION OF ALL PROSPECTIVE BIDDERS ON THE ABOVE REFERENCED PROJECT IS CALLED TO THE FOLLOWING LISTED MODIFICATION IN THE CONTRACT DOCUMENTS:

1. Attached are the revised schedule of prices. Please remove the existing schedule of prices and insert the revise schedule of prices (revised 5/2/22).
2. The description for items has changed for Horizontal Sawcutting/ Grinding Sidewalk on the schedule of prices.
3. Quantities have been reduced due to limit of funds available for project.
4. Item for Curb Head Cut has been added to the revised schedule of prices. Curb head is to be cut to provide depressed curb and flared within 1' to full head and sloped at no greater than 8:1 toward the pavement. The curb is to be horizontally cut mechanically so the front of the head of curb meets the flowline of the gutter. The Curb Head Cut will be measured by length along the horizontal cut and taper cuts and paid per the contract unit price per linear foot. The contractor is to dispose of the removed concrete and shall include all work associated with this item as part of the unit price.
5. The Horizontal sawcutting/Grinding locations and the ADA ramp locations list has been updated and is attached. This list is representative of the Horizontal sawcutting/ Grinding and ADA ramp locations to be performed through this contract and may change. The final list of locations will be provided to the contractor at the time of Notice to Proceed and will include locations which are funded by the adjacent property owners on a 50/50 basis or damaged by trees.
6. The work for this project shall be completed by Nov. 1, 2022.
7. Attached is the IDOT detail for TY 12 Frame & Grate.

The Acknowledgement of the Receipt of all Addendums must be printed clearly on the outside of your Bid Package or your Bid may not be opened.

NO. 17

2022 SIDEWALK/CURB REPLACEMENT PROJECT- CENTRAL JOLIET AREA

CITY OF JOLIET
SCHEDULE OF PRICES

ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNITS	UNIT PRICE	COST
NO. 1	P.C.C. SIDEWALK REMOVAL & REPLACEMENT, 5"	12500	SQ FT		
NO. 2	P.C.C. SIDEWALK, 5"	220	SQ FT		
NO. 3	CONCRETE CURB & GUTTER REMOVAL & REPLACEMENT	720	LN FT		
NO. 4	CONCRETE CURB	100	LIN FT		
NO. 5	P.C.C. DRIVEWAY PAVEMENT REMOVAL & REPLACEMENT, 6"	70	SQ YD		
NO. 6	CURB HEAD CUT	25	LIN FT		
NO. 7	BUFFALO BOX/ VALVE BOX ADJUSTMENT	3	EACH		
NO. 8	HOT MIX ASPHALT REMOVAL & REPLACEMENT,3"	60	SQ YD		
NO. 9	HORIZONTAL SAW CUTTING/ GRINDING SIDEWALK -0.25" TO 0.75" AVERAGE HEIGHT DIFFERENTIAL AT JOINT	100	IN-FT		
NO. 10	HORIZONTAL SAW CUTTING/ GRINDING SIDEWALK - 1" TO 2" AVG HEIGHT DIFFERENTIAL AT JOINT	100	IN-FT		
NO. 11	DETECTABLE WARNINGS	350	SQ FT		
NO. 12	CONCRETE REMOVAL ONLY/ RESTORATION WITH 5" TOPSOIL & SEED W/EROSION CONTROL BLANKET	106	SQ FT		
NO. 13	REMOVAL AND DISPOSAL OF CONTAMINATED MATERIAL	5	CU YD		
NO. 14	STRUCTURE TO BE ADJUSTED	8	EACH		
NO. 15	FRAME & GRATE TO BE FURNISHED AND INSTALLED, TY 12 (see detail)	3	EACH		
NO. 16	FRAME & LID TO BE FURNISHED AND INSTALLED, TY 1 ADA	3	EACH		
NO. 17	TREE ROOT PRUNNING- 8" DIAMETER AND GREATER	26	EACH		
NO. 18	BRICK PAVER REMOVAL & RE-INSTALLATION	20	SQ FT		
NO. 19	REGRADING AND RESTORATION W/ EROSION CONTROL BLANKET	150	SQ YD		

BIDDER'S PROPOSAL FOR IMPROVEMENTS:

CONTRACTOR NAME: _____


ADDRESS: _____


CITY/STATE/ ZIP: _____

TEL NO.: _____


EMAIL ADDRESS: _____

Subject Location (blue shaded- ADA location)	HSC/G (horizontal saw cut or grind) description measure in length at joint (ft),and average height (inches)	HSC/ GRINDING 0.25"- 0.75"	HSC/ GRINDING 1.00"- 2.0"	Measurement ADA Tile (SF)
2616 Lakeridge Drive	0	0	0	0
2614 Lakeridge Drive- regrind claim	4'*0.5", 2'*0.5"	3	0	0
1031 Loren Drive	4*0.75"	3	0	0
401 W. Bevan Drive	5*0.75"	3.75	0	0
991 Essington Road	1'*0.25", 6'*1", 2'*0.5", 6'*1.25"	1.25	13.5	0
1000 Essington Road	5'x1", 5'x0.75"	3.75	5	0
1032 Louise Lane	3'*0.5", 4'*1", 3'*1", 2'*1"	1.5	9	0
1037 Loren Drive	0	0	0	0
1038 Loren Drive	1'*0.5", 3'*1", 2'*0.5"(2)	1.5	3	12
1032 Louise Drive (ADA)	0	0	0	12
1037 Loren Drive (ada)	0	0	0	12
1031 Loren Drive (ADA)	0	0	0	12
2107 George Avenue ADA(needs 397)	0	0	0	20
SE cor Hennepin & Essington	0	0	0	16
SE cor Lake Shore W & Hennepin	0	0	0	12
SW cor Lake Shore W & Hennepin	0	0	0	12
246 Rebecca Road ADA (done)	0	0	0	10
Steven Smith - Buck ADA corner Southeast	0	0	0	16
Steven Smith - Buck ADA corner Northeast	0	0	0	8
Steven Smith - Buck ADA corner Southwest	0	0	0	8
Northwest corner Loren Kathy ADA	0	0	0	16
Infrantry & Jodee (Golfview Estates) ADA NE	0	0	0	10
Infrantry & Jodee (Golfview Estates) ADA SE	0	0	0	10
SE cor Lake Shore E & Hennepin and drainage issue	0	0	0	10
SE cor Lake Shore E & Hennepin	0	0	0	10
3820 Hennepin Dr	2'*0.5"(2)	2	0	10
2803 Grand Prairie Dr	4'*0.25"	1	0	10
Devonshire/Harrogate ADA	0	0	0	20
nw cor Edgerton/Herrogate	0	0	0	20
SW cor Edgeton/Herrogate	0	0	0	10
Edgerton-Herrogate New SW across street	0	0	0	10
Midhurst/Edgerton ADA	0	0	0	0
1232 Raymond Street ADA	0	0	0	16
3772 Pandola Avenue ADA	0	0	0	8
3609 Hennepin Dr	4'*1",3'*0.75", 2.5'*0.5",	3.625	4	0
Infrantry & Jodee (Golfview Estates)	5'*1", 3'*0.75", 5'*1", 4'*1" ; 4'*0.75", 3'*0.5"; 4'*0.5";3'*0.75"(2); 3'*0.75"; 3'*0.75"; 3'*0.5"; 5'*0.5"; 5'*0.5"; 3'*0.5", 3'*0.75"	30.25	14	0
2107 George Avenue(needs 969)	5'*1"(2)	0	10	0
2009 Arden Place	5'*0.5"	2.5	0	0
2439 Glenwood Avenue	5'*1.5", 4'*1", 5'*0.75", 5'*1"	3.75	16.5	0
3908 Brenton Drive	4'*1"	0	4	0

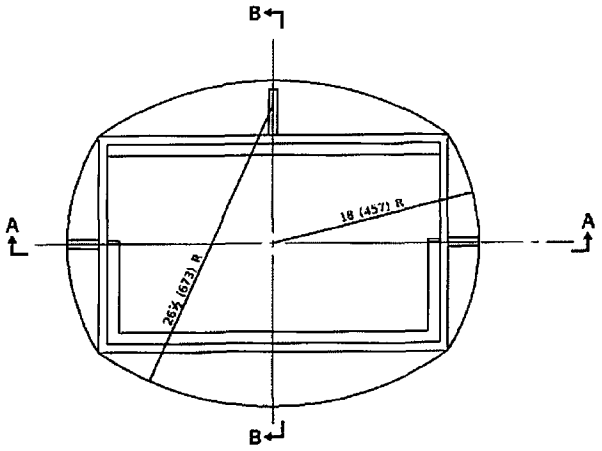

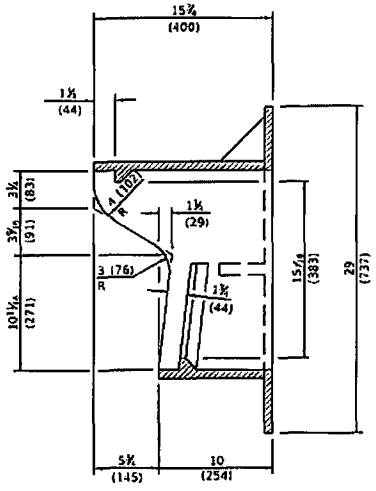


SECTION B-B

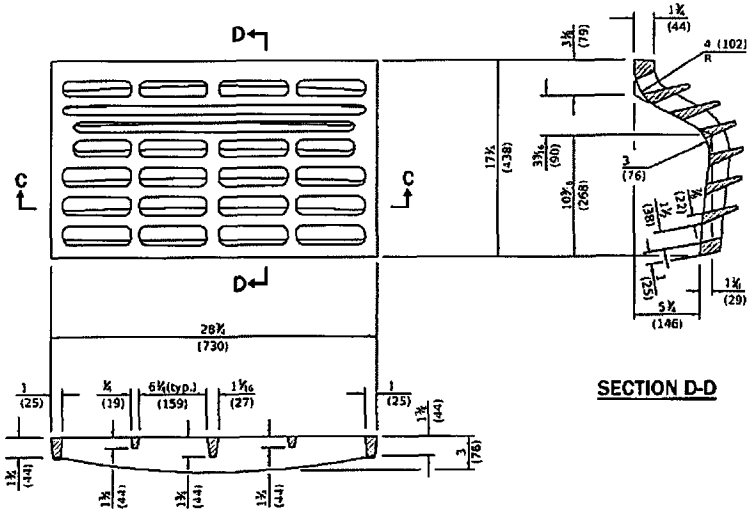

SECTION C-C

SECTION D-D

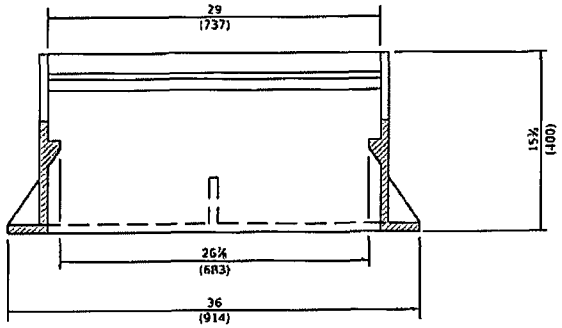

SECTION A-A

CAST FRAME

CAST GRATE

All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
1-1-15	Revised dimensions of frame and grate.
1-1-09	Switched units to English (metric).

FRAME AND GRATE TYPE 12

STANDARD 604061-03

Illinois Department of Transportation

PASSED January 1, 2015

ENGINEER OF POLICY AND PROCEDURES

APPROVED January 1, 2015

ENGINEER OF BUREAU AND ENVIRONMENT

ISSUED 11-07